




# Stainless Steel Braided EPDM Hose

## HEAT PUMP ASSEMBLIES

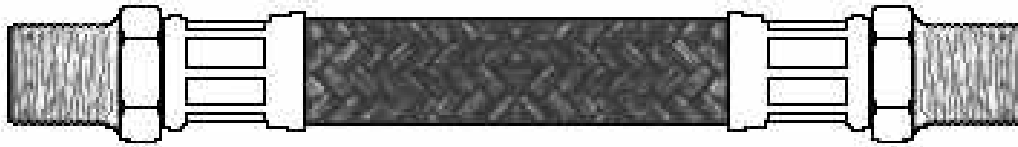

For Vibration

Isolation & Pipe

Expansion Movement

Water source heat pumps

Fan coils

Water coolers

Water heaters

Water fountains

### Materials of Construction

Male & female fittings: 1/2" - 1" Brass, 1-1/4" - 2" Steel

Ferrules: Available in steel, stainless, and aluminum

Braided hose: Stainless steel outer braid covering and EPDM core

Gasket: Fiber washer

### Engineering Data

Maximum temperature range 25° / 195° F.

Hose Assemblies are Intended for Water Use Only!

This is a fire rated flexible connector.

Hose Fittings Available: Fixed Male x Male Swivel & Fixed Male x Female Swivel

Lengths Available from 12" - 48" in 6" Increments

Contact Factory for Custom Lengths and Sizes

HPH Series

NEW!

Common Uses:

Water Source  
Heat Pumps

Fan Coils

Water Coolers

Water Heaters

Water Fountains

Fire Rated


&

NSF 61




# Stainless Steel Braided EPDM Hose

## HPH SERIES

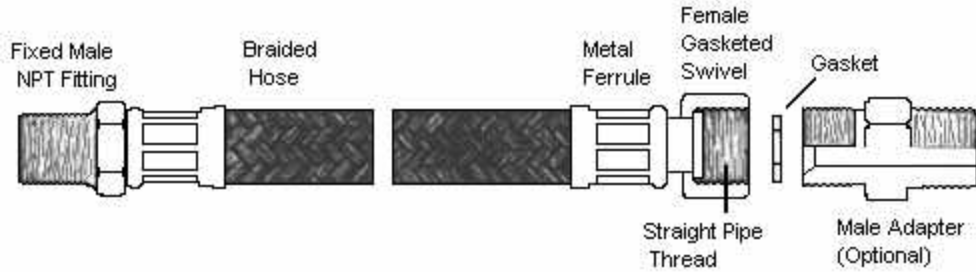

SIZE	BEND RADIUS	WORKING PRESSURE	BURST PRESSURE	TEMP. MIN/MAX
1/2"	2"	350 PSI	1400 PSI	25°/195° F
3/4"	3.25"	300 PSI	1200 PSI	25°/195° F
1"	4"	225 PSI	900 PSI	25°/195° F
1-1/4"	5.25"	200 PSI	800 PSI	25°/195° F
1-1/2"	6.5"	150 PSI	600 PSI	25°/195° F
2"	8"	100 PSI	400 PSI	25°/195° F

## HPHC SERIES

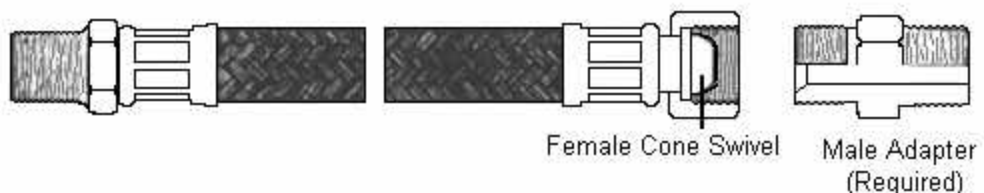

SIZE	BEND RADIUS	WORKING PRESSURE	BURST PRESSURE	TEMP. MIN/MAX
1/2"	2"	350 PSI	1400 PSI	25°/195° F
3/4"	3.25"	300 PSI	1200 PSI	25°/195° F
1"	4"	225 PSI	900 PSI	25°/195° F

Contact Factory for Custom Lengths and Sizes